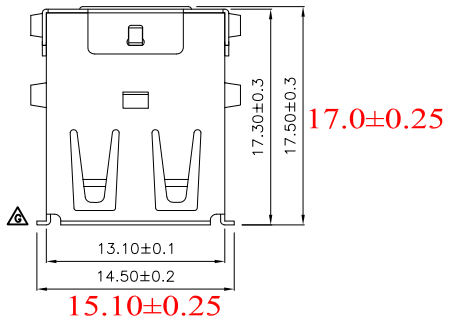

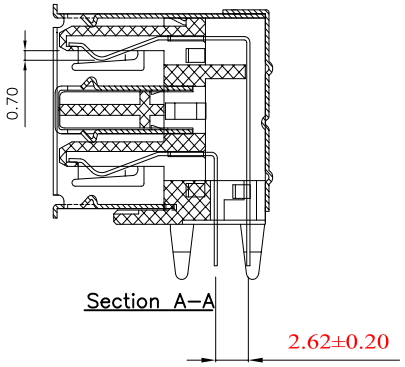



Specifications:
Current Rating:1.5A AC/DC
Voltage Rating:30V AC/DC
Contact Resistance:30m ohm. Max. 25m
Insulation Resistance:1,000M ohm. min.
Withstanding Voltage:500V AC For One Minute 750V
Operating Temperature Range:−40°C ~ +105°C
Material and Finish -55 ~ 85°C
Insulator:PBT (UL94V−0)
Insulator Color:Black
Contact:Brass
Plating:Gold Flash Plated on Contact Area,
Tin Plated on Solder Tail.
Shell:Brass,Nickel Plated
Back Cover:Brass,Nickel Plated
SPCC

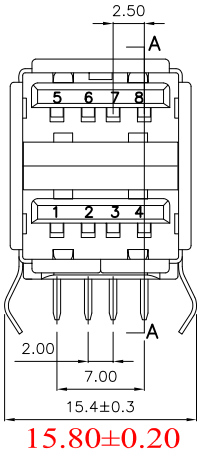

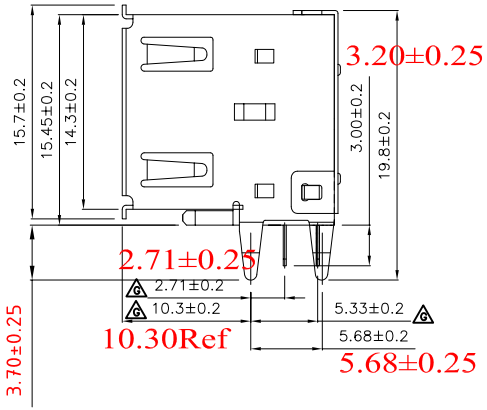



Note: Dimension in red represents old dimension

PCB layout

RoHS Compliant

REV	DATE	FILE	BY
	05−FEB−2020		

DRAWN:

CHECKED:

APPROVAL:

GENERAL TOLERANCE:
.X=±0.20 ±0.38
.XX=±0.15 ±0.25

UNIT: MM

SCALE:1:1

SHEET: 1 / 2

PROJECTION:

CnC Tech
Industrial Cable and Connector Technology

DESCRIPTION:
USB A Double Socket R/A,G/F

PART NO:
1001-004-01010

SIZE
A4