



1 2 3 4 5

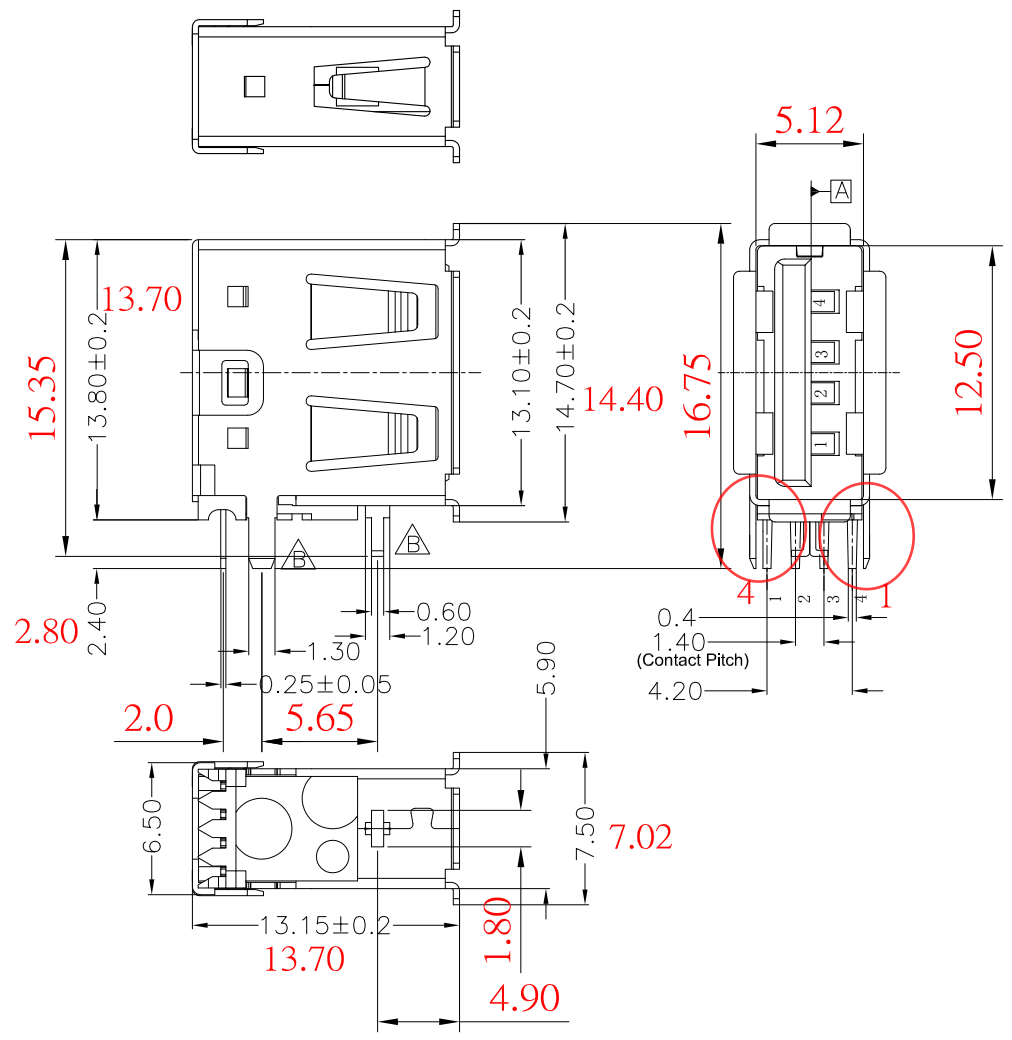

Specifications:  
 Current Rating:1.5A(DC) **1.0A**  
 Voltage Rating:30V(DC)  
 Contact Resistance:30m ohm Max.  
 Insulation Resistance:1,000M ohm min.at 500V(DC)  
 Withstanding Voltage:500V AC For One Minute  
 Operating Temperature Range:-40°C ~ +105°C  
 Material and Finish  
 Insulator:PBT (UL94V-0)  
 Insulator:Color: Black  
 Contact:Brass **Phosphor Bronze**  
 Plating:Gold Flash Plated on Contact Area,  
 Tin Plated on Solder Tail.  
 Shell:K7, Nickel Plated  
**Brass**

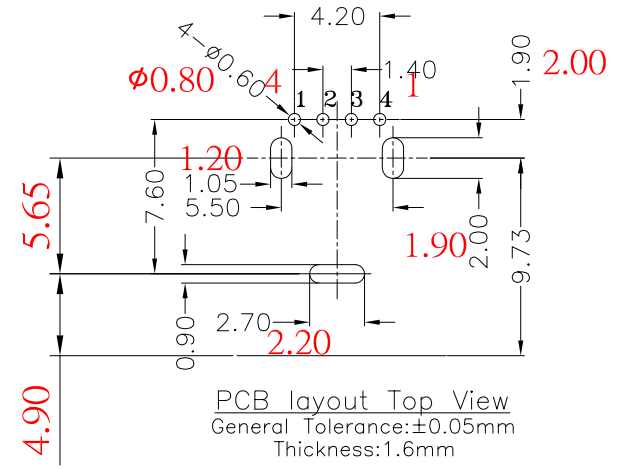

Note: Dimension in red represents old dimension

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 <b>±0.30</b> .XX=±0.15 <b>±0.25</b>	<h1 style="text-align: center; color: red;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED:	UNIT: MM		
					SCALE:1:1	PART NO: <b>1001-008B-01001</b>	A4
	05-FEB-2020			APPROVAL:	SHEET: 1 / 2		
REV	DATE	FILE	BY		PROJECTION:		

A  
B  
C  
D