

Specifications:

Current Rating: 1.5A AC/DC

Voltage Rating: 30V AC/DC

Contact Resistance: 20m Ohm. Max. 30m

Insulation Resistance: 1000M Ohm. Min.

Withstanding Voltage: 750V AC/Minute 500V

Operating Temperature Range: -40°C ~ +105°C

Materials:

Insulator: LCP(UL94V-0) PBT+30%GF

Insulator Color: White


Contact: Brass

Plating: 30u" Gold Plated on Contact Area,

Tin Plated on Solder Tails.

Shell: Brass, Nickel Plated Gold and tin over nickel plating

SPCC

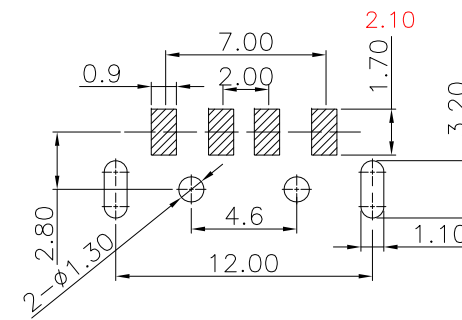

PCB layout

Note: Dimension in red represents old dimension

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED:	UNIT: MM		
					SCALE: 1:1	USB A Male SMD Type, 30u"	SIZE
	05-FEB-2020			APPROVAL:	SHEET: 1 / 2	PART NO:	A4
REV	DATE	FILE	BY		PROJECTION:	1002-016-01101	