










1

2

3

4

5

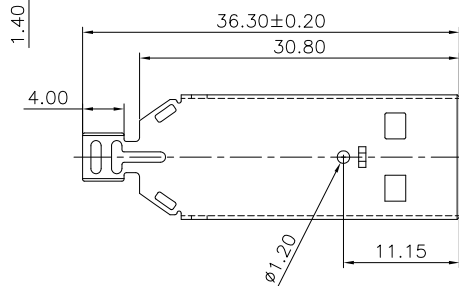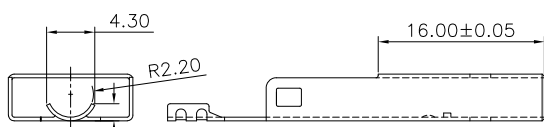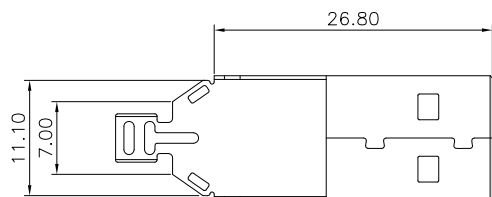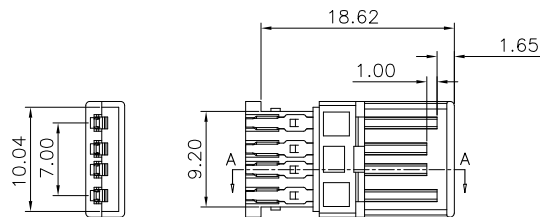

Specifications:  
 Current Rating: 1.5A AC,DC  
 Voltage Rating: 30V AC,DC  
 Contact Resistance: 30m ohm.Max  
 Insulation Resistance: 1000M ohm.Min  
 Withstanding Voltage: 500V AC/Minute  
 Operating Temperature Range: -25°C ~ +85°C  
 Mechanical:  
 Mating: 35N Max.  
 Unmating: 10N Min.  
 Durability: 1500 Cycles Min.  
 Material and Finish:  
 Insulator: PBT(UL94V-0)  
 Insulator Color: Black or White  
 Contact: Copper Alloy  
 Plating: 30u" Gold Plated on Contact Area,  
 Tin Plated on Solder Tail All over Nickel Plated.  
 Shell: SPCC, Nickel Plated

RoHS Compliant

DRAWN:

GENERAL TOLERANCE:

.X=±0.35  
 .XX=±0.25  
 .XXX=±0.15

**CnC Tech**  
 Industrial Cable and Connector Technology

CHECKED:

UNIT: MM

DESCRIPTION:

SIZE

SCALE: 1:1

USB A Plug Solder Type, 30u"

APPROVAL:


SHEET: 1 / 1

PART NO:

A4

05-FEB-2020

PROJECTION:



1002-024-01300

REV

DATE

FILE

BY