


Specifications:
 Current Rating: 1.5A AC/DC (VBS&GND)
 0.25A AC/DC (Others)
 Voltage Rating: 30V AC/DC
 Contact Resistance: 30m ohm. Max. (VBS&GND)
 50m ohm. Max. (Others)
 Insulation Resistance: 100M ohm. Min.
 Withstanding Voltage: 100V AC For One Minute
 Operating Temperature Range: -40°C to +105°C
 Material and Finish
 Insulator: PBT (UL94V-0)
 Insulator Color: Blue
 Contact: Phosphor Bronze
 Plating: 15u" Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell: Brass, Nickel Plated

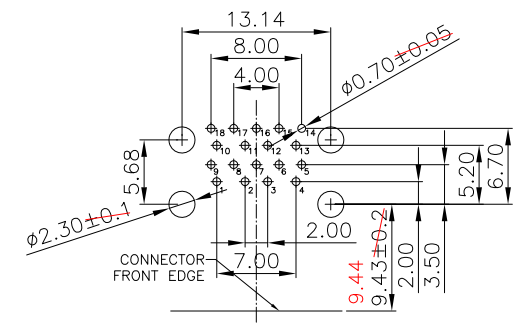

PCB layout (TOP VIEW)

Note: Dimension in red represents old dimension

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 ±0.38 .XX=±0.10 ±0.25	<h1 style="text-align: center; color: red;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED:	UNIT: MM		
					SCALE: 1:1	USB 3.0 AF Double Rows Right Angle Dip Type, 15u"	SIZE
	05-FEB-2020			APPROVAL:	SHEET: 1 / 2	PART NO:	A4
REV	DATE	FILE	BY		PROJECTION:	1003-004-01010	