



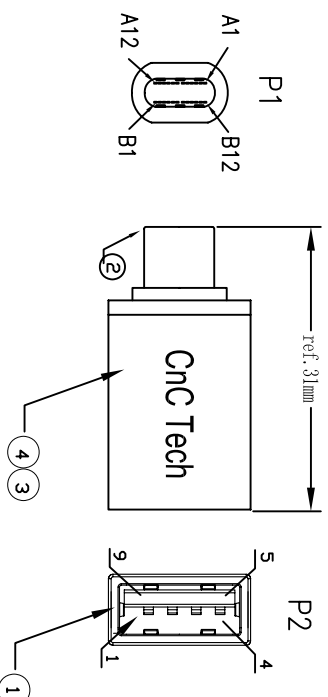

1.Wiring Diagram.

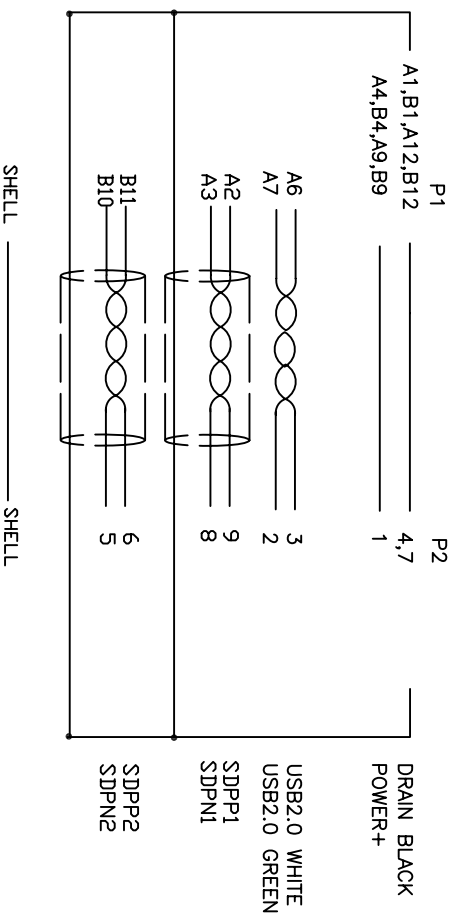

2.Cable test condition :

Open / Short : 100%
 Insulation resistance : 5M ohms
 Contact resistance : 2 ohm
 Hipot : DC 300V / 1 sec
 3Each pcs with PE polybag.

4	COVER	ALUMINUM SHELL SILVER	1	
3	PE	LLDPE 500026 6201 BLACK	10g	
2	CONN	TYPE C 3.0 MALE G/F BLACK W/PCB+R+C	1	P1
1	CONN	USB3.0 A/F G/F BLUE	1	P2
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF
BILL OF MATERIAL				

A	INITIAL RELEASE	2018/04/20
REVE/CN#	DESCRIPTION	DATE
Cnc Tech,LLC		
DRAWN	DATE	TITLE
EDWIN	2018/04/20	USB C OTG Adapter,SILVER
CHECKED	CUSTOMER P/N:	OWN NO.
EDWIN		1005-1050-SV
APPROVAL	CUSTOMER:	REV
		A
SHEET 1 OF 1		