

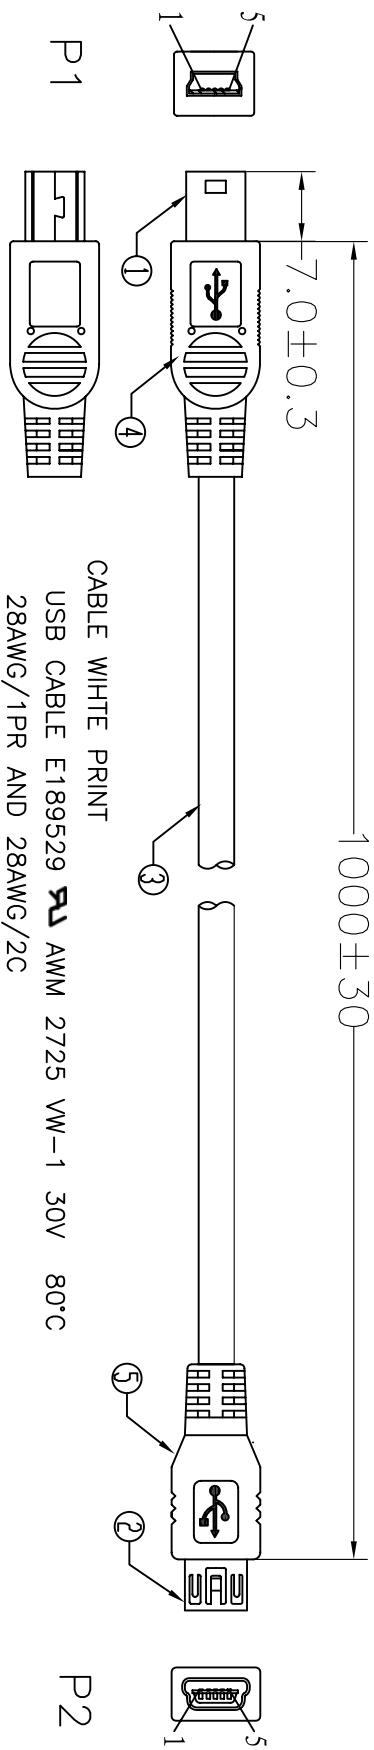


UNIT:mm

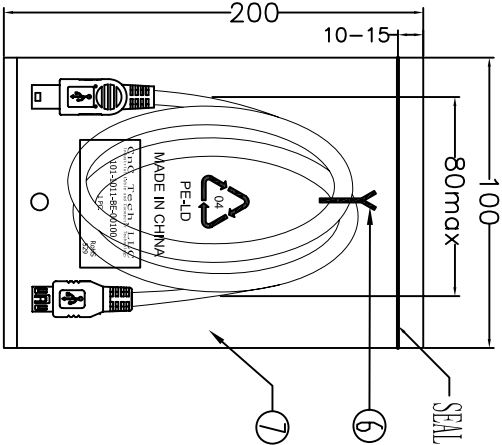

PIN ASSIGNMENT:

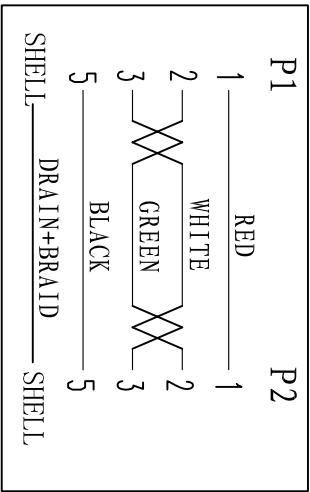

Electrical test:
1. 100% short, open, miswire test
2. Conduct resistance: 2 Ohm(max)
3. Insulation resistance: 5Mohm(min)
4. dielectric test: DC 300V

⑧	PE 袋	1/10	透明PE袋大小尺寸: 230*300*0.05mm 印刷黑色“MADE IN CHINA”及印生产周期,有透气孔.
⑦	PE 袋	1	透明PE袋大小尺寸: 100*200*0.05mm 印刷黑色“MADE IN CHINA”及印生产周期,有透气孔.
⑥	扎带	1	黑色 L=80mm
⑤	内模	1.5g	透明 LD-PE (Mould NO.: NM-101)
④	外模	4.8g	黑色 PVC-40P (MOULD NO.: WM-196)
③	线材	6g	黑色 PVC-40P (MOULD NO.: WM-67)
②	接头	1	黑色 USB1.1 UL2725 28#/1P+28#/2C+AEB OD: 3.8mm L=1000±10
①	接头	1	MINI USB 5P 母 壳镀镍 PIN G/F 焊线成型式 黑胶芯
NO.	NAME	Q'TY	MINI USB 5P公刺破式 一体式长铁壳镀镍 中线夹,铁壳厚度0.35黑胶芯黑后盖,0.9*4端子青铜镀金G/F

CNC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1011-BE-00100
DECIDED		DATE	2012-02-14
VERSIONS/EDITED	A/0	PROJECTION	

