

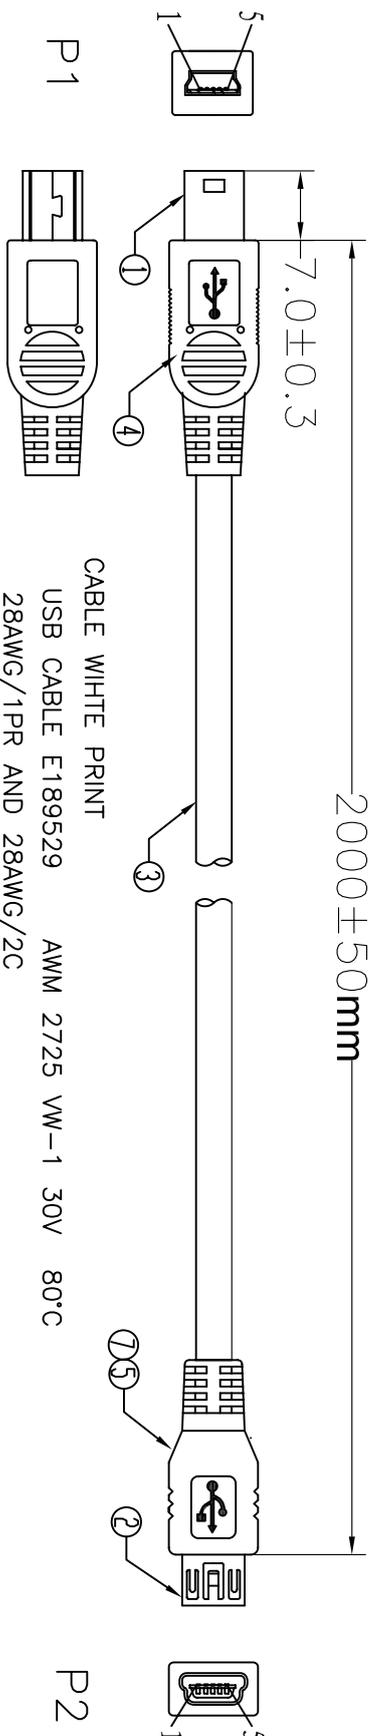


UNIT:mm

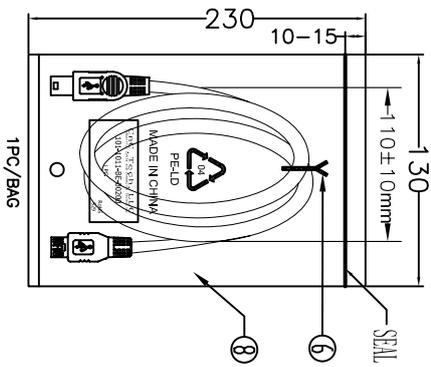

PIN ASSIGNMENT:

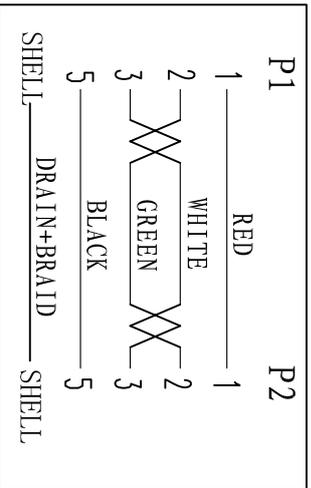

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

⑨	PE 袋	1/10	透明PE袋大小尺寸: 280*8330*0.05mm 印刷黑色“MADE IN CHINA”+“10PCS”及印生产日期,有透气孔.
⑧	PE 袋	1	透明PE袋大小尺寸: 130*230*0.05mm 印刷黑色“MADE IN CHINA”及印生产日期,有透气孔.
⑦	套管	1	黑色热套管OD:1.5mm L8mm.
⑥	扎带	1	黑色 L=80mm
⑤	内模	1.5g	透明 LD-PE (Mould NO.:NM-101)
④	外模	4.8g	黑色 PVC-40P (MOULD NO.:WM-196)
③	线材	6g	黑色 PVC-40P (MOULD NO.:WM-88)
②	接头	1	黑色 USB1.1 UI 2725 28#/1P+28#/2C+ABE OD:3.8mm L=2000 ± 10
①	接头	1	MINI USB 5P 母 壳镀镍 PIN G/F 焊线成型式 黑胶芯
NO.	NAME	Q'TY	MINI USB 5P公刺破式 一体式长铁壳镀镍 中线夹,铁壳厚度0.35黑胶芯黑后盖,0.9*4端子青铜镀金G/F

<b>CNC Tech, LLC</b>			
Industrial Cable and Connector Technology			
DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1011-BE-00200
DECIDED		DATE	2012-02-14
VERSIONS/EDITED	A/0	PROJECTION	