



Specifications
 Current Rating:3.0A AC/DC 1A
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max
 Insulation Resistance:1000M ohm. Min
 Withstanding Voltage:600V AC For one minute 500V
 Operating Temperature Range : -40°C to +105°C

Material:
 Plastic:Nylon 6T (UL94V-0) PBT
 Standard Color:Black
 Contact:Copper Alloy Brass
 Plating:Gold Plated Flash Gold

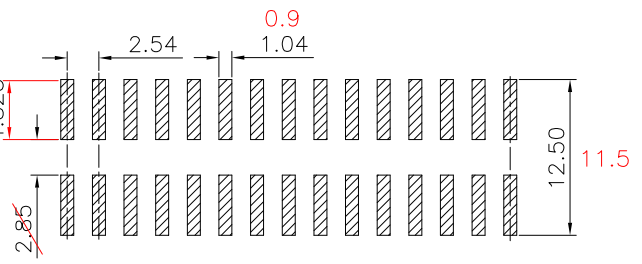


P.C.B Layout

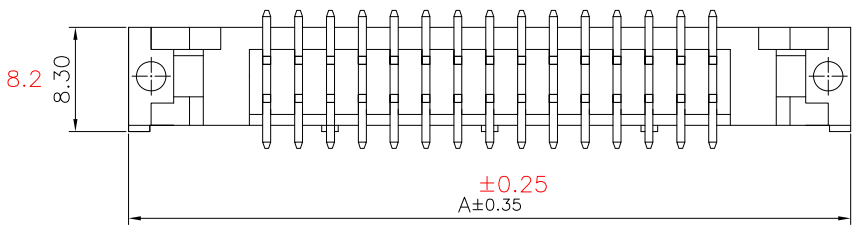


Notes:
 60P · 64P With Three Key
 All Other Pin With One Key

Circuits	Dim					
	A	prior 20/06	B	prior 20/06	C	prior 20/06
6	27.12	26.92	5.08	5.08	-	22.86
8	29.66	29.46	7.62	7.62	-	25.40
10	32.20	32.00	10.16	10.16	-	27.94
12	34.74	34.54	12.70	12.70	-	30.48
14	37.28	37.08	15.24	15.24	-	33.02
16	39.82	39.62	17.78	17.78	-	35.56
20	44.90	44.70	22.86	22.86	-	40.64
24	49.98	49.78	27.94	27.94	-	45.72
26	52.52	52.32	30.48	30.48	-	48.26
30	57.60	57.40	35.56	35.56	-	53.34
34	62.68	62.48	40.64	40.64	-	58.42
40	70.30	70.10	48.26	48.26	-	66.04
50	83.00	82.80	60.96	60.96	-	78.74
60	95.70	95.50	73.66	73.66	-	91.44
64	100.78	100.58	78.74	78.74	-	96.52

MATING PART
 3030-XX-0102-00

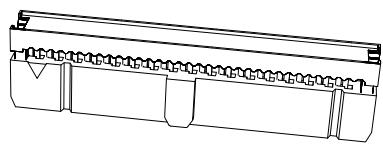

MATING PART
 3030-XX-0101-00

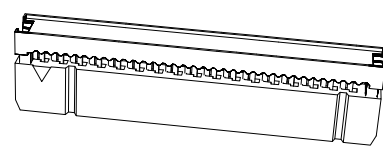

Note: Dimension in red represents old dimension

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED:	UNIT: MM		
					SCALE:1:1	2.54mm Shrouded Header With Ejector SMD Type	SIZE
	05-FEB-2020			APPROVAL:	SHEET: 1 / 1	PART NO:	A4
REV	DATE	FILE	BY	PROJECTION:		3010-XX-003-12-00	

A
B
C
D