

1

2




3

4

5

Specifications:
 Current Rating:3.0A AC,DC
 Voltage Rating:250V AC, DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:1,000M ohm Min
 Withstanding Voltage:600V AC/minute
 Operating Temperature Range:-40°C ~ +105°C

Materials:
 Insulator:Nylon 6T UL94V-0
 Insulator Color:Black
 Terminal:Copper Alloy
 Finish:Gold Flash

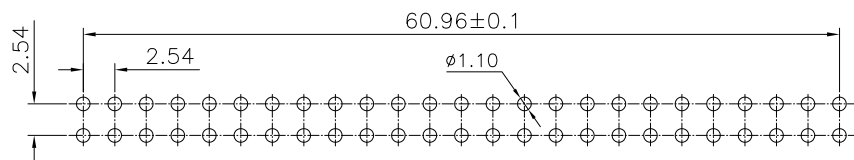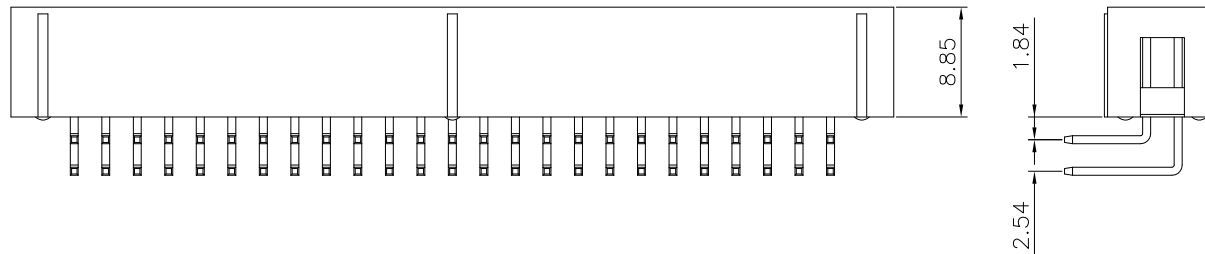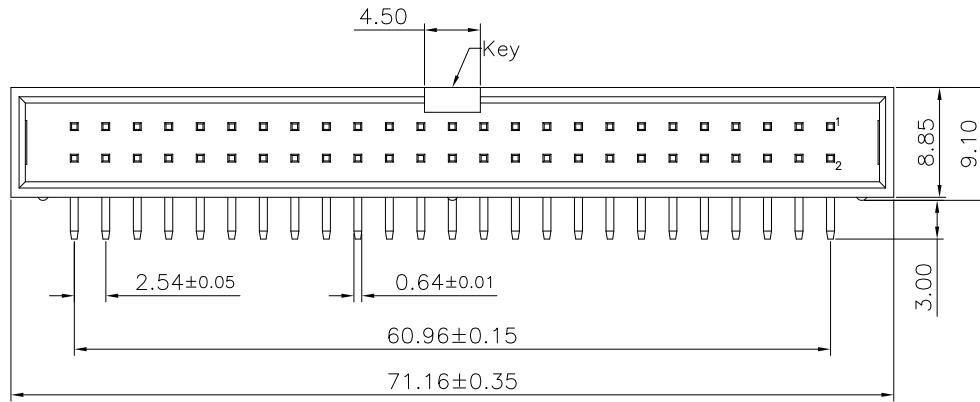

PCB Layout

RoHS Compliant

| | | | | | | | | |
|-----|------|------|----|-----------|---------------------------------------------|--------------------------------------------------------------|--|--------------------------------------------|
| | | | | DRAWN: | GENERAL TOLERANCE: .X=±0.20 .XX=±0.15 | CnC Tech Industrial Cable and Connector Technology | | |
| | | | | CHECKED: | UNIT: MM | | | DESCRIPTION: 2.54mm Box Header R/A Type |
| | | | | | SCALE:1:1 | | | A4 |
| | | | | APPROVAL: | SHEET: 1 / 2 | PART NO: 3020-50-0200-00 | | |
| REV | DATE | FILE | BY | | PROJECTION: | | | |

A

B

C

D


1

2

3

4


5

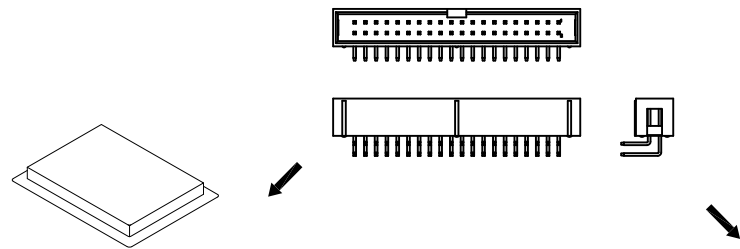


COVER TRAY

BOTTOM TRAY

TRAY




23 TRAYS

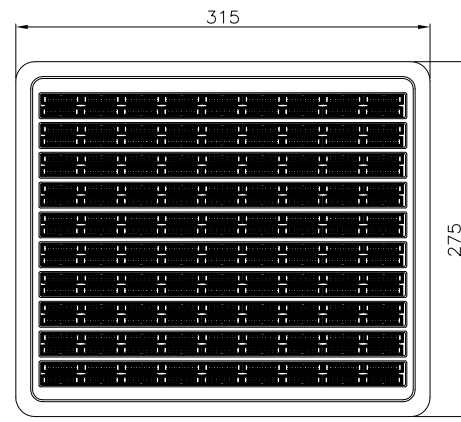


Note:
 1.Dimension:
 Tray Size:315(L)x275(W)x14.5(H) (mm)
 Carton Size:320(L)x290(W)x350(H) (mm)
 2.Quantity:

| Circits | Pcs/Tray | Tray/Carton | Q'TY |
|---------|----------|-------------|------|
| 50 | 60 | 23 | 1380 |



CARTON



RoHS Compliant

| REV | DATE | FILE | BY |
|-----|------|------|----|
| | | | |
| | | | |
| | | | |
| | | | |

| | |
|-----------|---------------------------------------------|
| DRAWN: | GENERAL TOLERANCE: .X=±0.20 .XX=±0.15 |
| CHECKED: | |
| APPROVAL: | UNIT: MM |
| | SCALE:1:1 |
| | SHEET: 2 / 2 |
| | PROJECTION: |

| | |
|--------------------------------------------------------------|------------|
| CnC Tech Industrial Cable and Connector Technology | |
| DESCRIPTION: 2.54mm Box Header R/A Type | SIZE A4 |
| PART NO: 3020-50-0200-00 | |

A
B
C
D