


UNIT:mm



3000±50

40±5

40±5

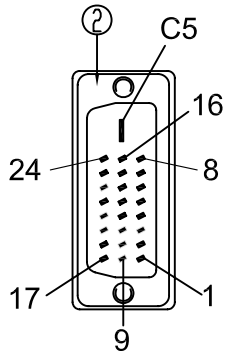

P1

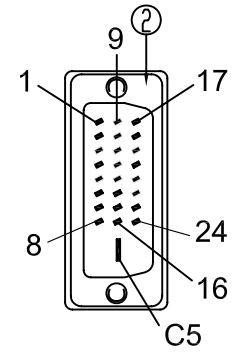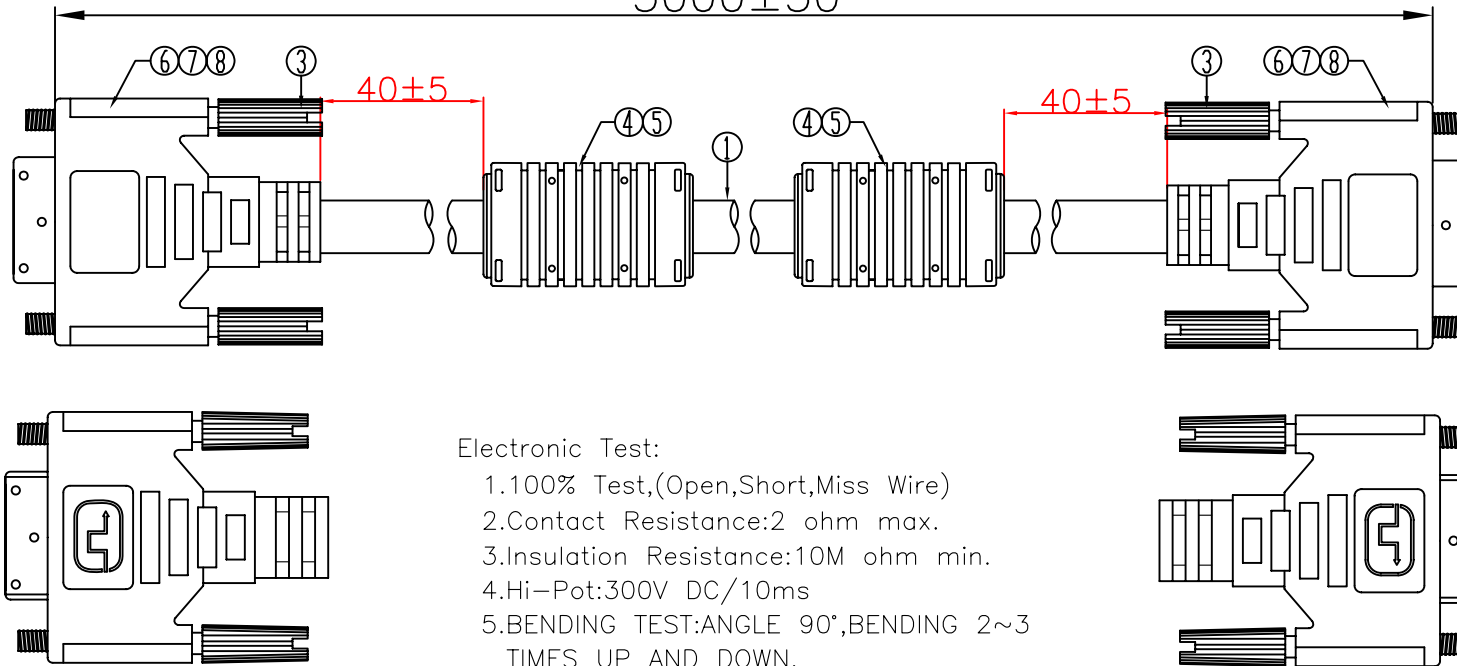

P2

Electronic Test:

- 1.100% Test,(Open,Short,Miss Wire)
- 2.Contact Resistance:2 ohm max.
- 3.Insulation Resistance:10M ohm min.
- 4.Hi-Pot:300V DC/10ms
- 5.BENDING TEST:ANGLE 90°,BENDING 2~3 TIMES UP AND DOWN.

|     |            |      |   |
|-----|------------|------|---|
| ⑧   | TUBE       | 14   | HEAT SHRINK TUBE BLACK OD2.0mm L=8mm  |
|     |            | 8    | HEAT SHRINK TUBE BLACK OD1.5mm L=15mm   |
|     |            | 2    | HEAT SHRINK TUBE BLACK OD1.0mm L=25mm   |
| ⑦   | Copper     | 2    | Copper Foil W30mm*L75mm   |
|     |            | ⑥    | IN JACKET   |
|     | OUT JACKET | 42g  | WHITE (EC-005/W-18#) PVC 50P(WM-17)   |
| ⑤   | OUT JACKET | 20g  | BALCK PVC 45P (CH-002)  |
| ④   | FERRITE    | 2    | CORE:RH17.5*10.6*28.5mm   |
| ③   | SCREW      | 4    | SCREW:#4-40UNC Ø2.8*L32mm PLATED NI MOLD:WHTIE(EC-005/W-18#) ABS                                      |
| ②   | CONN       | 2    | DVI(24+1) MALE INSULATION BLACK.SHELL NICKEL,PIN GOLD FLASH.  |
| ①   | CABLE      | 1    | UL20276 [(28AWG/1P+DW+AL/MY)*7C+28AWG*5C]+AL/MY+BD+D.W+BD+JACKET:BK#<br>OD:8.6±0.15mm L=3000+30/-0mm. |
| NO. | NAME       | Q'TY | SPECIFICATION   |

**CnC Tech, LLC**  
Industrial Cable and Connector Technology

|                  |        |             |                 |
|------------------|--------|-------------|-----------------|
| DRAWN BY         | LYNDON | DARWING NO. | VG/LJQ-094-013  |
| CHECKED BY       |        | CUSTOMER    | <b>CNC</b>      |
| APPROVAL BY      |        | ITEM NO.    | 750-10011-00300 |
| DECIDE BY        |        | DATE        | 2017-08-30      |
| VERSIONS/EDITEON | A/0    | PROJECTION  |                 |