


1

2







3

4

5



Specifications:
 Current Rating: 1.5 Amps AC/DC
 Voltage Rating : 50V AC/DC **30V**
 Withstanding Voltage: 500V AC
 Contact Resistance: 30m ohm max
 Insulation Resistance: 1000M ohm min
 Temperature Range: -40°C ~ 105°C
 Material: **-55 ~ 85°C**
 Insulator: PBT(UL94V-0)
 Insulator Color: Black
 Contact: Brass
 Plating: 30u" Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell: Metal Iron, Nickel Plated
SPCC

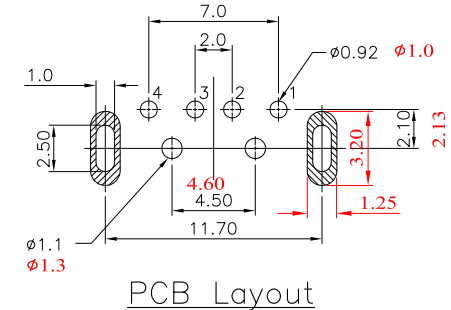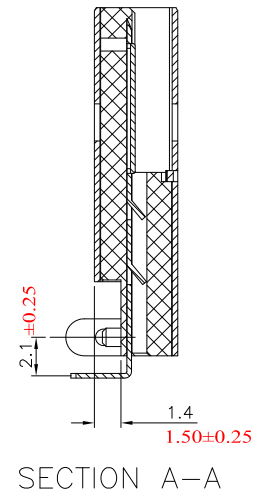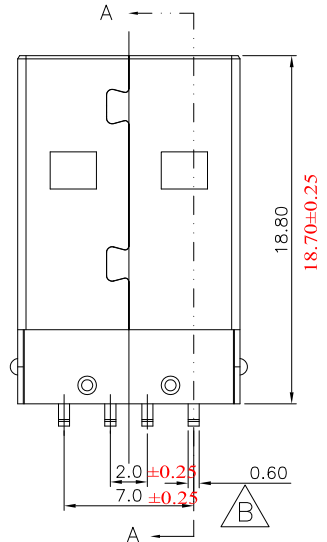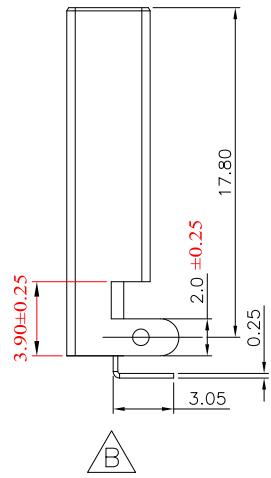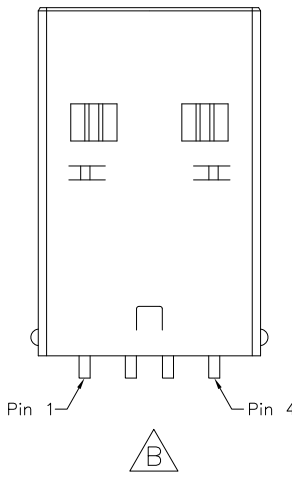

Note: Dimension in red represents old dimension

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X = ±0.20 ±0.30 .XX = ±0.10 ±0.15	CnC Tech Industrial Cable and Connector Technology	
				CHECKED:	UNIT: MM SCALE: 1:1		DESCRIPTION: USB A Male Right Angle Type, 30u"
				APPROVAL:	SHEET: 1 / 2	PART NO:	A4
REV	DATE	FILE	BY		PROJECTION:	1002-015-01001	

A

B

C

D