


1

2

3


4

5



Specifications:
 Current Rating: 1.0A AC,DC 5A
 Contact Resistance: 50m ohm.Max 30m
 Insulation Resistance: 100M ohm.Min 1000M
 Withstanding Voltage: 100V AC/Minute 5000V

Material:
 Insulator: Nylon6T(UL94V-0), Black PBT
 Back Cover: LCP(UL94V-0), Black
 Contact: Phosphor Bronze
 Finish: 15u" Gold/Tin Plated
 Front Shell: SUS304, Nickel Plated
 Hook: SUS301
 Upper SPCC: SPCC, Nickel Plated SHELL:BRASS
 Lower SPCC: SPCC, Nickel Plated SHELL:SPCC

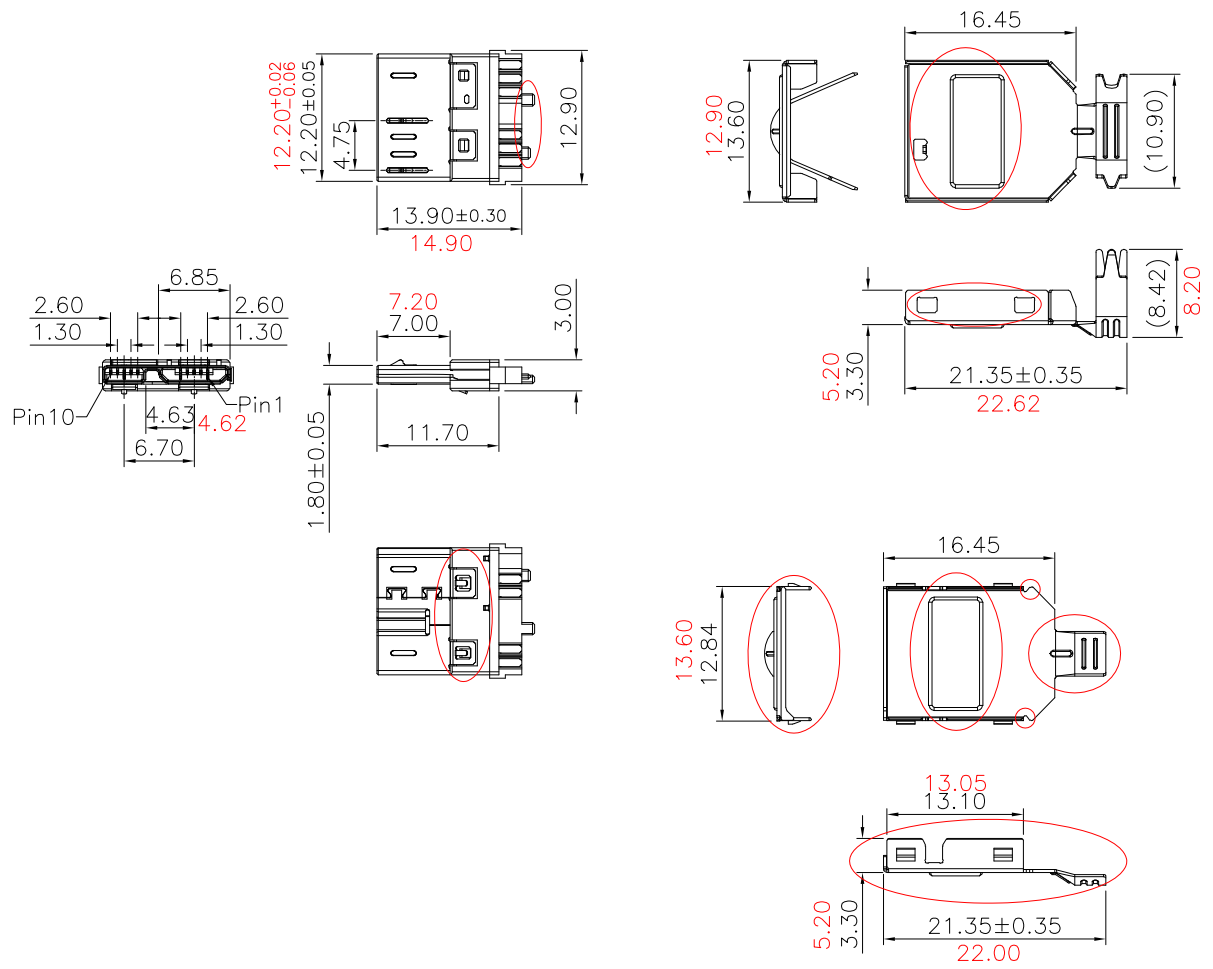

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>		
				CHECKED:	UNIT: MM SCALE: 1:1			DESCRIPTION: Micro USB 3.0,10P,B/M, Solder Assembly Type,15u"
				APPROVAL:	SHEET: 1 / 1	PART NO:	A4	
REV	DATE	FILE	BY		PROJECTION:	1003-026-22300		

A

B

C

D