

Specifications:


Current rating: 1.0A AC/DC **3A**
 Voltage rating: 100V AC/DC **60V**
 Contact resistance: 15m ohm. max. **4m ohm**
 Insulator resistance: 5000M ohm. Min. **1000M ohm**
 Withstanding voltage: 1000V AC for one minute
 Operating temperature range: -40°C to +105°C
-55°C

Material and Finish:

Insulator: PBT (UL94V-0)
 Standard Color: Black
 Contact: Beryllium Copper (Becu) Gold Plated
 Sleeve Barrel: Copper Alloy Gold Plated
Brass

Note1: W/O middle bar (6~16P)
 With middle bar (18~64P)

Part No.	Circuits	Dim							
		A	prior 20/06	B	prior 20/06	C	prior 20/06	D	prior 20/06
215-1-XX-003	6	7.62	7.62	5.08	5.08	7.62	7.62	10.16	10.16
	8	10.16	10.16	7.62	7.62	7.62	7.62	10.16	10.16
	14	17.78	17.78	15.24	15.24	7.62	7.62	10.16	10.16
	16	20.32	20.32	17.78	17.76	7.62	7.62	10.16	10.16
	18	22.86	22.86	20.32	20.32	7.62	7.62	10.16	10.16
215-1-XX-006	20	25.40	25.40	22.86	22.86	7.62	7.62	10.16	10.16
	24	30.48	30.48	27.94	27.94	15.24	15.24	17.78	17.78
	28	35.56	35.56	33.02	33.02	15.24	15.24	17.78	17.78
	32	40.64	40.64	38.10	38.10	15.24	15.24	17.78	17.78
	40	50.80	50.80	48.26	48.26	15.24	15.24	17.78	17.78
	42	53.34	-	50.80	-	15.24	-	17.78	-
	48	60.96	-	58.42	-	15.24	-	17.78	-

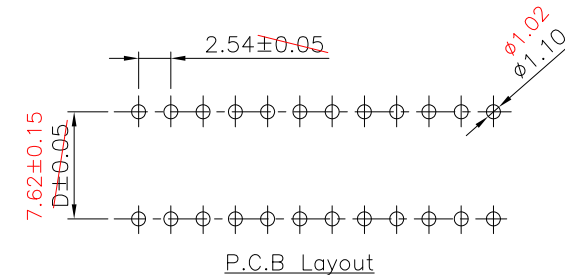

Note: Dimension in red represents old dimension

RoHS Compliant

				DRAWN: JAMIE	GENERAL TOLERANCE: .X = ±0.20 ±0.30 .XX = ±0.15 ±0.20	<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>		
				CHECKED: JERRY	UNIT: MM			DESCRIPTION: Screw Machine Pin IC Socket Wire Wrap Type
					SCALE: 1:1	PART NO:	A4	
	05-FEB-2020			APPROVAL: RORY	SHEET: 1 / 1	215-1-XX-00X		
REV	DATE	FILE	BY		PROJECTION:			