


Specifications: **3A**
 Current Rating: **1.0A** AC,DC
 Voltage Rating: 250V AC,DC
 Contact Resistance: 20m ohm.Max
 Insulation Resistance: 5000M ohm.Min
 Withstanding Voltage: 1000V AC/Minute
 Operating Temperature Range: -40°C ~ +85°C

Material And Finish:
 Insulator: PBT UL94V-0
 Insulator Color: Black
 Contact: **Phosphor Bronze** Brass
 Plated: Tin Plated

10.02

Circuits	DIM.A	DIM.B	DIM.C	DIM.D	W/Bar	W/O Bar	Spacing
6	7.62	5.08	10.16	7.62		V	03
8	10.16	7.62	10.16	7.62		V	
14	17.78	15.24	10.16	7.62		V	
16	20.32	17.78	10.16	7.62		V	
18	22.86	20.32	10.16	7.62		V	
20	25.40	22.86	10.16	7.62		V	
24	30.48	27.94	10.16	7.62	V		04
28	35.56	33.02	10.16	7.62	V		
22	27.94	25.40	12.70	10.16	V		
24	30.48	27.94	17.78	15.24	V		
28	35.56	33.02	17.78	15.24	V		
32	40.64	38.10	17.78	15.24	V		
40	50.80	48.26	17.78	15.24	V		
42	53.34	50.80	17.78	15.24	V		
48	60.96	58.42	17.78	15.24	V		

Note: Dimension in red represents old dimension
 No 04/06 spacing Size

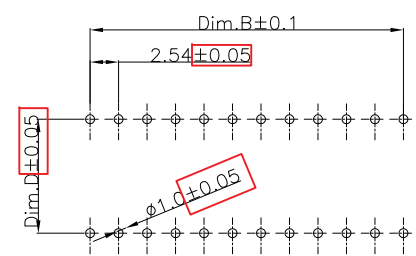

P.C.B. Layout

.X = ±0.30
 .XX = ±0.25
 .XXX = ±0.20

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X = ±0.20 .XX = ±0.15		<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>	
				CHECKED:	UNIT: MM	DESCRIPTION:		
				APPROVAL:	SCALE: 1:1	2.54mm IC Socket Stamp Pin With Kink		A4
B					SHEET: 1 / 1	PART NO:		
A					PROJECTION:	245-XX-1-0X		
REV	DATE	FILE	BY					