


1

2

3

4

5

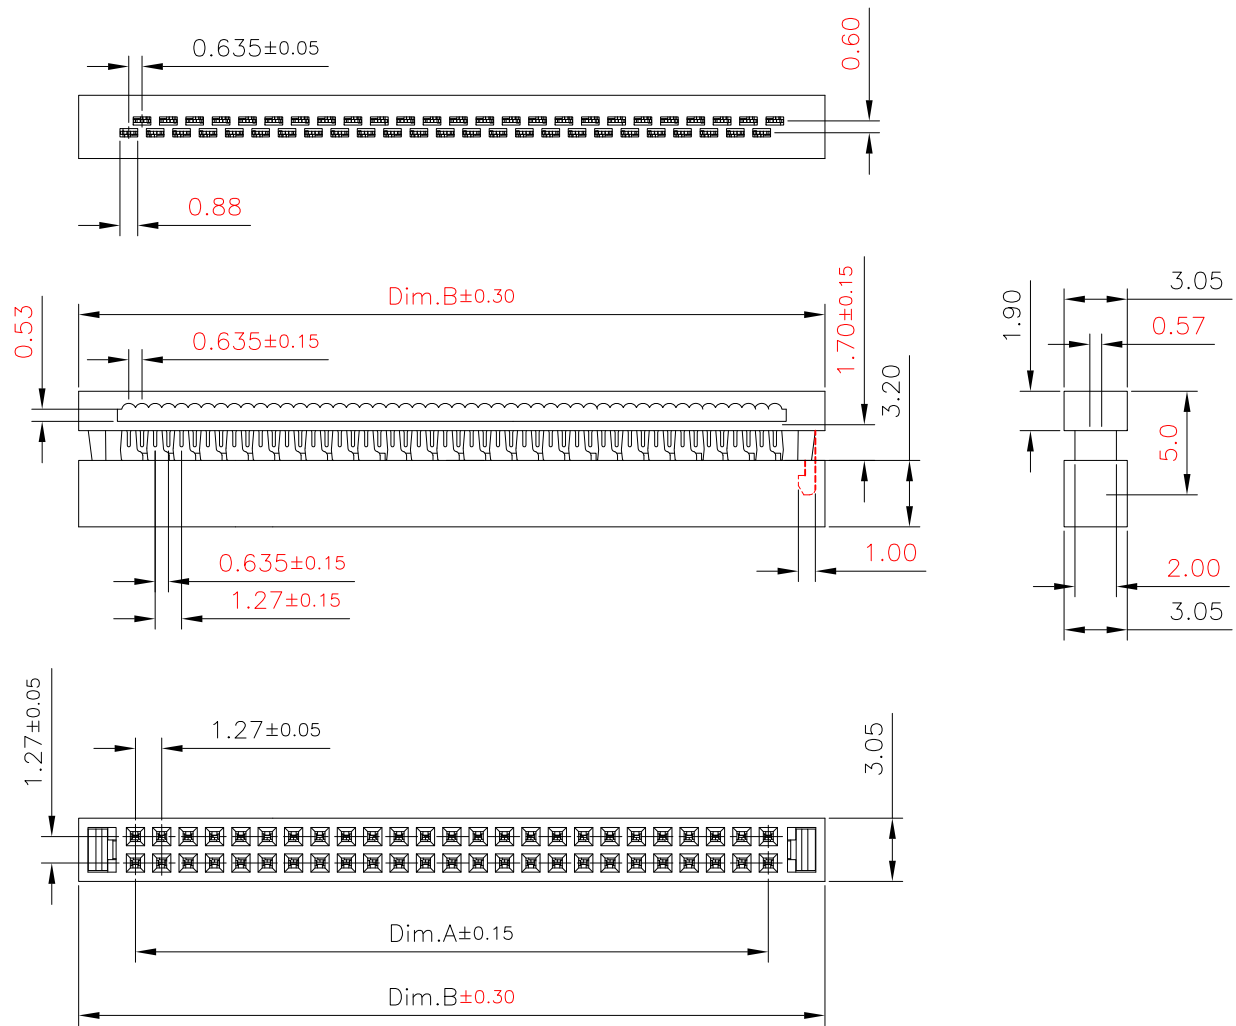

Specifications:

Current rating:1.0A AC,DC
 Voltage rating:250V AC, DC
 Contact resistance:20m ohm Max **20M ohm**
 Insulation resistance:100M ohm Min **1000M ohm**
 Withstanding voltage:500V AC/minute
 Operating Temperature:-40°C ~ +105°C

Materials:


Insulator:PBT UL94V-0
 Standard Color;Black
 Terminal:Phosphor Bronze **Brass**
 Finish:Gold Plated

Circuits	Dim			
	A	prior 20/06	B	prior 20/06
6	2.54	2.54	8.00	8.00
8	3.81	3.81	9.27	9.27
10	5.08	5.08	10.54	10.54
12	6.35	6.35	11.81	11.81
14	7.62	7.62	13.08	13.08
16	8.89	8.89	14.35	14.35
18	10.16		15.62	
20	11.43	11.43	16.89	16.89
24	13.97	13.97	19.43	19.43
26	15.24	15.24	20.70	20.70
28	16.51		21.97	
30	17.78	17.78	23.24	23.24
34	20.32	20.32	25.78	25.78
40	24.13	24.13	29.59	29.59
44	26.67	26.67	32.13	32.13
50	30.48	30.48	35.94	35.94

Note: Dimension in red represents old dimension

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 ±0.25 .XX=±0.15 ±0.20	<h1 style="color: red; text-align: center;">CnC Tech</h1> <p style="text-align: center;">Industrial Cable and Connector Technology</p>		
				CHECKED:				UNIT: MM
					SCALE:1:1	1.27x1.27mm Flat Cable IDC Socket		A4
	05-FEB-2020			APPROVAL:	SHEET: 1 / 2			
REV	DATE	FILE	BY		PROJECTION:			



A

B

C

D