


1

2

3

4

5

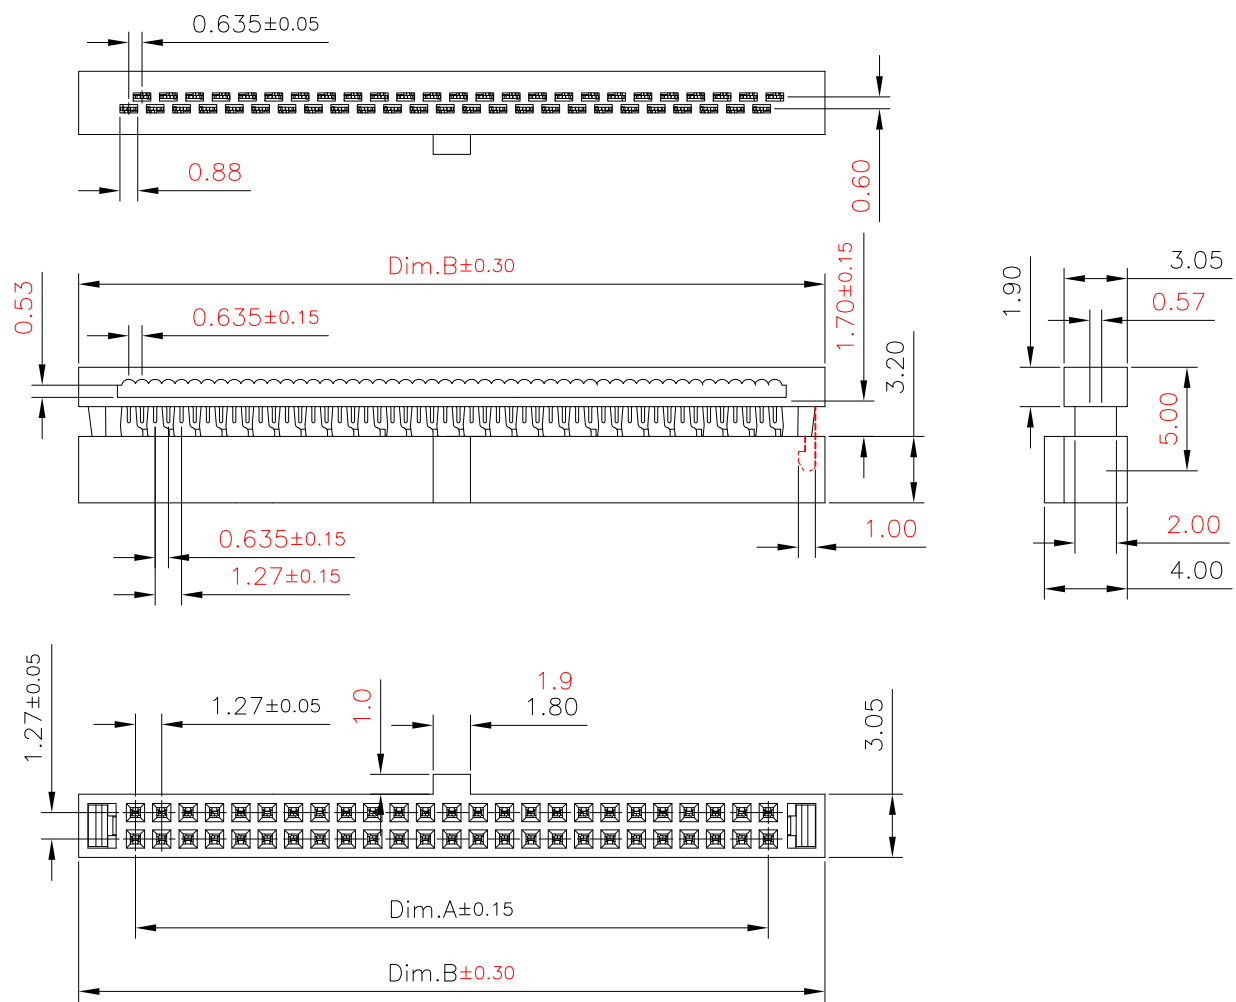

Specifications:  
 Current rating:1.0A AC,DC  
 Voltage rating:250V AC, DC  
 Contact resistance:20m ohm Max **20M ohm**  
 Insulation resistance:100M ohm Min **1000M ohm**  
 Withstanding voltage:500V AC/minute  
 Operating Temperature:-40°C ~ +105°C

Materials:  
 Insulator:PBT UL94V-0  
 Standard Color;Black  
 Terminal:Phosphor Bronze **Brass**  
 Finish:Gold Plated

Circuits	Dim			
	A	prior 20/06	B	prior 20/06
6	2.54	2.54	8.00	8.00
8	3.81	3.81	9.27	9.27
10	5.08	5.08	10.54	10.54
12	6.35	6.35	11.81	11.81
14	7.62	7.62	13.08	13.08
16	8.89	8.89	14.35	14.35
18	10.16		15.62	
20	11.43	11.43	16.89	16.89
24	13.97	13.97	19.43	19.43
26	15.24	15.24	20.70	20.70
28	16.51		21.97	
30	17.78	17.78	23.24	23.24
34	20.32	20.32	25.78	25.78
40	24.13	24.13	29.59	29.59
44	26.67	26.67	32.13	32.13
50	30.48	30.48	35.94	35.94

Note: Dimension in red represents old dimension

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE: .X=±0.20 ±0.25 .XX=±0.15 ±0.20	<b>CnC Tech</b> Industrial Cable and Connector Technology	DESCRIPTION: 1.27x1.27mm Flat Cable IDC Socket	SIZE A4
				CHECKED:				
				APPROVAL:	SCALE:1:1	PART NO: 3230-XX-0102-00		
05-FEB-2020					SHEET: 1 / 2			
REV	DATE	FILE	BY		PROJECTION:			